

WALL CONSTRUCTION

- ☐ CMU / CONCRETE / MASONRY
- ☐ GYPSUM BOARD

JAMB PROFILE

- ☐ SQUARE
- ☐ STANDARD 2"
- ☐ OTHER: _____

- ☐ RADIUS

- ☐ STANDARD $4\frac{1}{2}"$ FACE WITH $3\frac{5}{8}"$ RADIUS

FRAME CONSTRUCTION


- ☐ BOLTED

- ☐ $\frac{1}{4}"$ PROJ.


- ☐ FLUSH

- ☐ WELDED & GROUNDED SMOOTH

- ☐ MITERED & WELDED (VISIBLE HAIRLINE SEAM AT CORNERS)

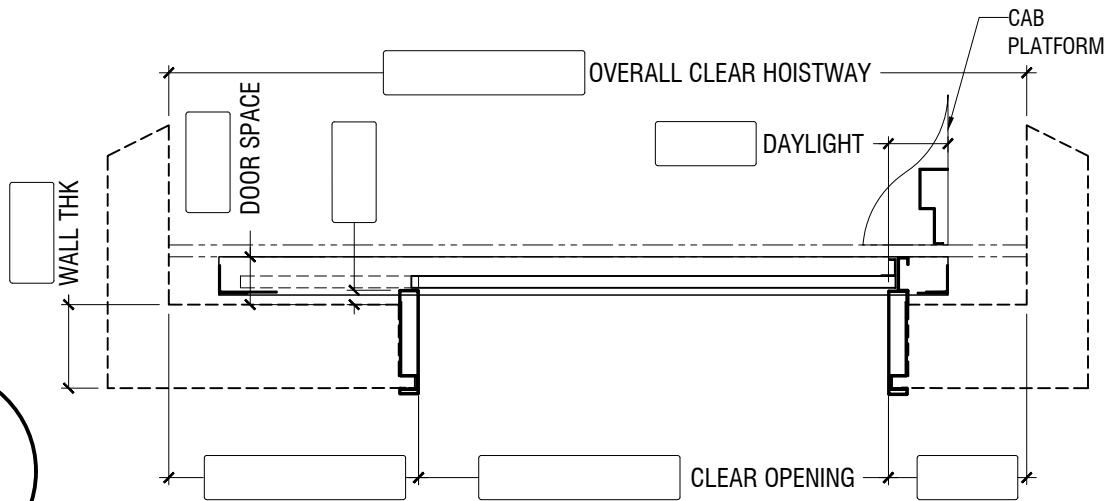

PLAN VIEW:

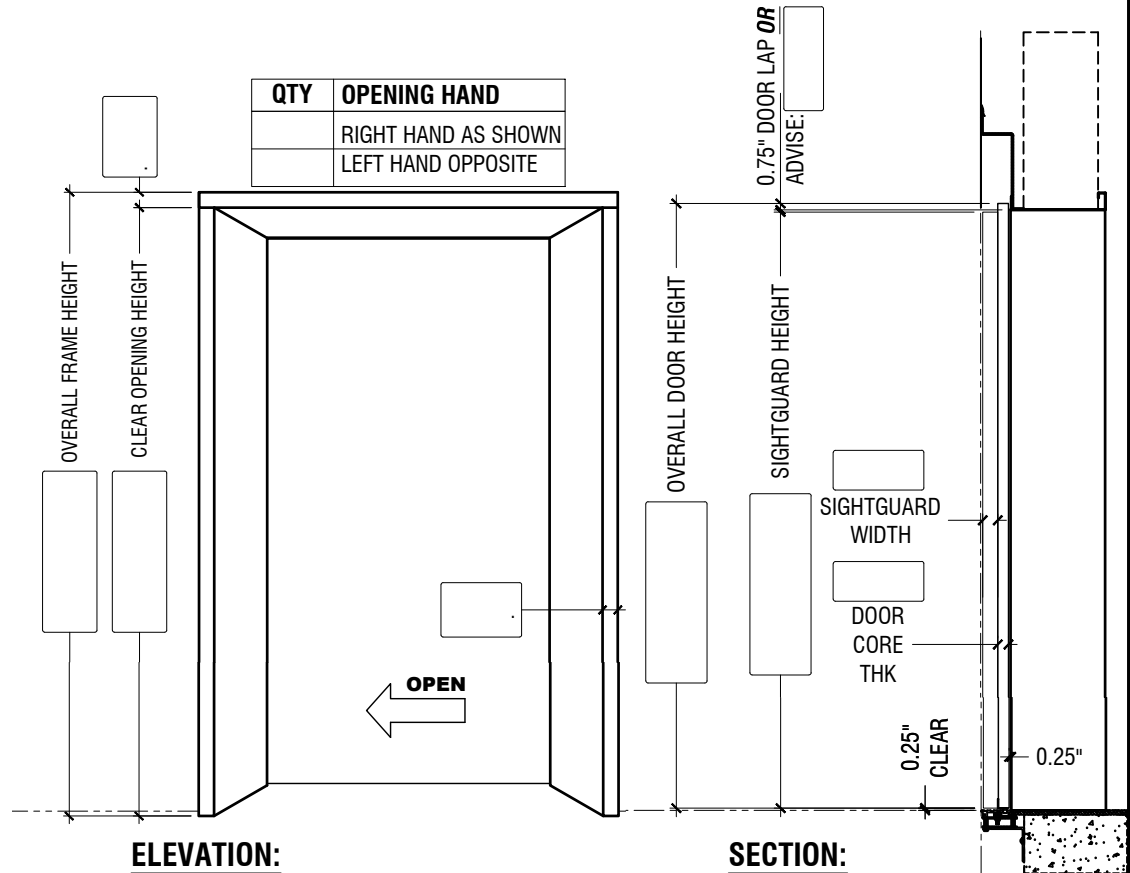

ELEVATION:

SECTION:

TRAVEL DISTANCES - FRONT

FLOOR	FLR-TO-FLR	FLOOR	FLR-TO-FLR
TOP FLOOR		4	
8		3	
7		2	
6		1	
5		PIT	

TRAVEL DISTANCES - REAR

FLOOR	FLR-TO-FLR	FLOOR	FLR-TO-FLR
TOP FLOOR		4	
8		3	
7		2	
6		1	
5		PIT	

1-SPD SIDE SLIDE ENTRANCE SURVEY

JOB NAME:

LOCATION:

CAR #:

OPERATOR:

FRAME/DOOR FINISH:

SPECIAL FEATURES:

SILL MAT'L:

☐ GAL ☐ WITTUR

☐ STAINLESS STEEL #4 OR #8

☐ STAINLESS STEEL

☐ MAC / RENOVA

☐ PAINTED

☐ ALUMINUM

☐ OTIS

☐ BRONZE #4 OR #8

☐ BRONZE

☐ OTHER:

☐ NICKEL SILVER

